

HD PRO SERIES

Series dedicated to the installer looking for high-level cameras that make the difference in image quality.



I4-320A-VF-G

40M IR 2MP VARI-FOCAL LENS BULLET CAMERA

Equipped with a 2.8-12mm Vari-Focal lens, this 2MP bullet camera is designed for medium-distance surveillance systems (up to 40m) for indoor and outdoor scenarios. Featuring 4in1 technology selectable by a protected dipswitch, the camera is ideal for Plug & Play over existing analog infrastructure.



MAIN FEATURES




- 2MP
- Pro Series
- 1920x1080 Resolution
- 2.8-12mm Vari-Focal (88°-33°)
- 3D-DNR
- 4 in 1 (DIP Switch AHD/TVI/CVI/CVBS + PAL/NTSC)
- IP67
- COC support



SPECIFICATIONS

| | |
|------------------------|--|
| Image Sensor | 1/2.9" 2MP Sensor |
| Image Format | 16:9 |
| Effective Pixels | 1936x1096 |
| Scanning System | Progressive |
| Resolution | 2MP: 1920x1080 AHD/TVI/CVI 1MP: 1280x720 AHD/TVI/CVI CVBS: 700TVL |
| FPS | 25/30FPS |
| Min. Illumination | Color: 0.005lux @F1.2, AGC on B/W: 0lux with IR |
| D&N | True Day&Night-ICR |
| IR LED | 2 LED Array (40m) |
| OSD Menu | Available via CoC only |
| CoC Support | Yes |
| Day & Night Mode | Ext/Auto/Day/Night |
| Backlight Compensation | No |
| S/N Ratio | ≥52dB (AGC off) |
| White Balance | Auto / Manual |
| Noise Reduction | 3D-DNR |
| Video Output | 2MP / 1MP (Selected by OSD Menu) AHD/TVI/CVI/CVBS + PAL/NTSC (Selected by DIP Switch) |
| Privacy Mask | No |
| D-Effect | No |
| WDR | Digital |
| Lens (Field Of View) | 2.8-12mm Mega-Pixel Vari-Focal (88°-33°) |
| Power | DC12V/560mA |
| Operation Temperature | -30°C ~ 50°C, 10% ~ 90% humidity |
| Protection Rate | IP67 |
| Dimensions | 220.8*79.4*81.2mm |
| Net Weight | 700g |
| Junction Box | PR-JB12IP66 |

DIMENSIONS

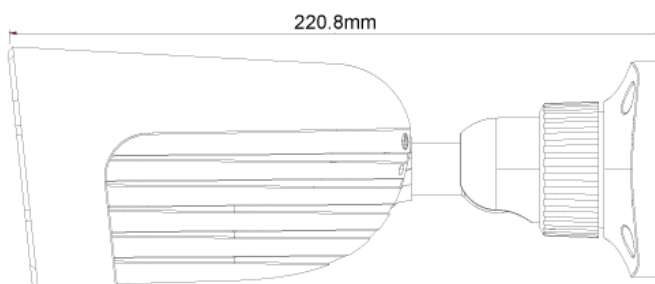

ACCESSORIES



PR-JB12IP66
Small Water-proof Junction Box